

Introduction

NetBrain features an entirely new system architecture to enable robust scalability and flexibility. The architecture is horizontally scalable, allowing for servers to be added, subtracted, or consolidated according to customer requirements. For larger network environments or if you need help in defining specs for high availability (HA) environments, please contact NetBrain Support Team for further assistance.

This document introduces the system overview and requirements in terms of:

- System Architecture
- Reference Specifications:

Note: This table shows the number of reference machines that you need to deploy the NetBrain system, depending on the number of devices and concurrent users.

Node and Seat Size	Number of Physical Machines
≤1000 Nodes ≤10 Seats	2 Machines
1001~2000 Nodes ≤10 Seats	2 Machines
2001~5000 Nodes ≤20 Seats	4 Machines
5001~10000 Nodes ≤50 Seats	<u>6 Machines</u>
10001~50000 Nodes ≤200 Seats	>8 Machines

- Deployment Prerequisites
- NetBrain Hard Disk Performance Specifications


System Architecture

NetBrain is an adaptive automation platform, where you can integrate with your existing Network Management System (NMS) tools and IT workflows to automate documentation, troubleshooting, network change, and defense.

It serves as an operating system of your whole network to relieve network professionals from manual CLI-digging and also empowers team collaboration to elevate productivity.

The browser-based interface of NetBrain is backed by a full-stack architecture, adopting advanced distributed technologies to support large-scale networks with more expansion possibilities.

The distributed system architecture is as follows:

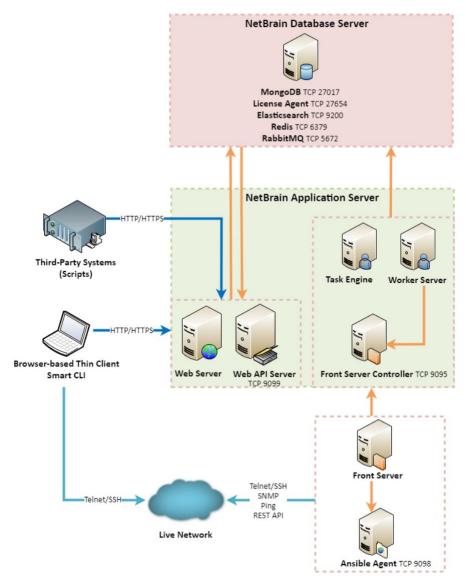

Note: The port numbers listed in the above architecture diagram are defaults only. The actual port numbers used during installation might be different.

The system components include:


Component	Description
Browser-based Thin Client	It provides a user interface for end users to access the system.
MongoDB	It serves as a system data repository.
License Agent	It provides services that validate and activate licenses.
Elasticsearch	It serves as a full-text search and analytics engine in a distributed multi-user environment.
Redis	It provides memory cache for the system.
RabbitMQ	It prioritizes and forwards requested tasks.
Web Server	It serves static content such as HTML, JavaScript, and CSS resources, which serves as the user interface of the Thin Client.
Web API Server	It provides the front-end web applications to support the browser-based Thin Clients and serves RESTful API calls from third-party applications for integration.
Worker Server	It serves as a resource manager to support computing tasks. It relies on both Redis and RabbitMQ to work.
Task Engine	It coordinates computing tasks.
Front Server Controller	It serves to coordinate and communicate with Front Servers and other components.
Front Server	It serves as a polling server to collect and parse live network data. It is the only component required to access the live network.
Service Monitor Agent	It monitors the health of your NetBrain Servers with operations management of related services.
Ansible Agent (add-on)	It integrates with Ansible to define, execute playbooks and visualize results in Change Management Runbooks. See <u>Ansible Integration</u> for more details.
Smart CLI (add-on)	It provides a Telnet/SSH client to connect to devices from Windows and can be integrated with NetBrain workflows. See <u>Smart CLI</u> for more details.

Reference Specifications

The following specifications are only for reference. Make your selections based on your network scale and use case.

Reference Specification for ≤1,000 Nodes & ≤10 Seats

This deployment requires one Windows server for applications and one Linux server for the database. Both physical machines and virtual machines are supported.

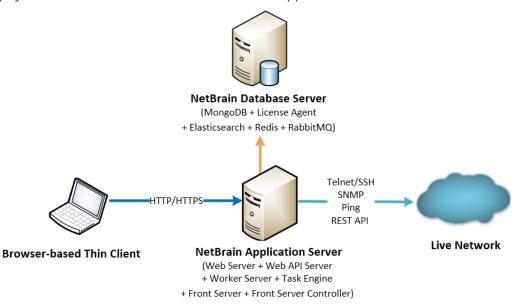

Environment	NetBrain Component	Machine Count	CPU ^{5) 7)}	Memory	Hard Disk ³⁾	Operating System
					(Free Space)	
≤1,000 nodes ≤10 users	Application Server	1	4 Physical Cores ¹⁾	16GB	200GB • SSD	 Windows Server 2016/2019/2022 (Standard/Datacenter Edition), 64-bit
	Database Server	1	4 Physical Cores ¹⁾	16GB ²⁾	300GB • SSD	Red Hat Enterprise Linux Server ⁸⁾
						8.2/8.3/8.4/8.5/8.6/8.7 /8.8/8,9/8.10/9.4/9.5, 64-bit
						• CentOS ⁸⁾ 8.2/8.3/8.4/8.5, 64-bit
						• Oracle Linux ⁸⁾ 8.2/8.3/8.4/8.5/8.6/8.7 /8.8/8.9/8.10/9.4/9.5, 64-bit
						Rocky Linux 8.4/8.5/8.6/8.7/8.8/8.9/8.10/ 9.4/9.5, 64-bit
						Alma Linux 8.4/8.5/8.6/8.7/8.8/8.9/8.10/ 9.4/9.5, 64-bit

- 1) If hyper-threading is enabled, one physical core equals two logical processors; in a virtual environment, the number of vCPUs required is twice the number of physical cores (as listed in the table).
- 2) Allocating at least half of the RAM amount for swap space on your Linux server is required to provide the necessary additional memory when the RAM space has been exhausted.
- 3) The required hard disk space must be exclusively reserved for NetBrain.
- 5) CPU must support AVX/AVX2.
- 6) For Linux servers, make sure each path has enough free space to install the component files:
- /var/, /etc/, and /usr/share/ more than 10GB
- /usr/ more than 5GB
- /bin/ more than 500MB
- ⁷⁾ x86_64 processors are supported, while ARM-based processors are not supported.
- 8) With the end-of-life of Linux 7.*, the following operating systems are only supported for upgrades to R12 and are not available for fresh installations: RHEL 7.5/7.6/7.7/7.8/7.9; CentOS 7.5/7.6/7.7/7.8/7.9; OL 7.7/7.8/7.9.

Network connectivity requirements for ≤1,000 nodes

Source	Destination	Protocol *) and Port Number **)
Thin Client Service Monitor Agent	Application Server	HTTP/HTTPS (80/443)
Application Server	Database Server	TCP 5672/6379/9200/27017/27654/15672 ***)
Application Server	Ansible Agent (add-on)	TCP 9098
Application Server	Live Network	ICMP/SNMP/Telnet/SSH/REST API
Database Server	Application Server	TCP 9099 ***)
Application Server	LLM Service (optional)	HTTPS 443


Note: *) If SSL was enabled for any component including MongoDB/ElasticSearch/Redis/RabbitMQ/License Agent/Front Server Controller/Ansible Agent/Auto Update Server (within Web API Server), the SSL protocol should be added to firewall rules to enable SSL connection between servers.

Note: **) The port numbers listed in this column are defaults only. The actual port numbers used during installation might be different.

Note: ***) Ensure the ports (9099 and 15672) are open for future system update.

Reference Specification for 1,001~2,000 Nodes & ≤10 Seats

This deployment requires one Windows server for applications and one Linux server for the database. Both physical machines and virtual machines are supported.

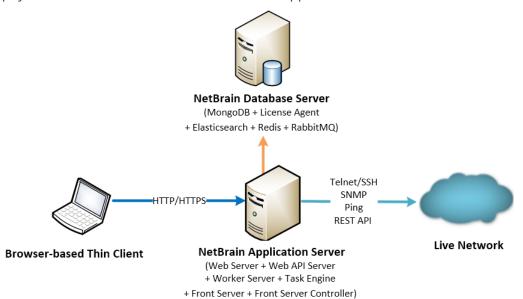

Environment	NetBrain Component	Machine Count	CPU ^{5) 7)}	Memory	Hard Disk ³⁾	Operating System
	Component				(Free Space)	
1,001~2,000 nodes ≤ 10 users	Application Server	1	4 Physical Cores ¹⁾	32GB	200GB • SSD	 Windows Server 2016/2019/2022 (Standard/Datacenter Edition), 64-bit
	Database Server	1	4 Physical Cores ¹⁾	32GB ²⁾	300GB • SSD	 Red Hat Enterprise Linux Server ⁸⁾ 8.2/8.3/8.4/8.5/8.6/8.7/8.8/8.9/ 8.10/9.4/9.5, 64-bit
						• CentOS ⁸⁾ 8.2/8.3/8.4/8.5, 64-bit
						 Oracle Linux ⁸⁾ 8.2/8.3/8.4/8.5/8.6/8.7/8.8/8.9/ 8.10/9.4/9.5, 64-bit
						Rocky Linux
						8.4/8.5/8.6/8.7/8.8/8.9/8.10/ 9.4/9.5, 64-bit
						Alma Linux 8.4/8.5/8.6/8.7/8.8/8.9/8.10/ 9.4/9.5, 64-bit

- 1) If hyper-threading is enabled, one physical core equals two logical processors; in a virtual environment, the number of vCPUs required is twice the number of physical cores (as listed in the table).
- 2) Allocating at least half of the RAM amount for swap space on your Linux server is required to provide the necessary additional memory when the RAM space has been exhausted.
- 3) The required hard disk space must be exclusively reserved for NetBrain.
- 5) CPU must support AVX/AVX2.
- ⁶⁾ For Linux servers, make sure each path has enough free space to install the component files:
- /var/, /etc/, and /usr/share/ more than 10GB
- /usr/ more than 5GB
- /bin/ more than 500MB
- ⁷⁾ x86_64 processors are supported, while ARM-based processors are not supported.
- 8) With the end-of-life of Linux 7.*, the following operating systems are only supported for upgrades to R12 and are not available for fresh installations: RHEL 7.5/7.6/7.7/7.8/7.9; CentOS 7.5/7.6/7.7/7.8/7.9; OL 7.7/7.8/7.9.

Network connectivity requirements for 1,001~2,000 nodes

Source	Destination	Protocol *) and Port Number **)
Thin Client Service Monitor Agent	Application Server	HTTP/HTTPS (80/443)
Application Server	Database Server	TCP 5672/6379/9200/27017/27654/15672 ***)
Application Server	Ansible Agent (add-on)	TCP 9098
Application Server	Live Network	ICMP/SNMP/Telnet/SSH/REST API
Database Server	Application Server	TCP 9099 ***)
Application Server	LLM Service (optional)	HTTPS 443


Note: *) If SSL was enabled for any component including MongoDB/ElasticSearch/Redis/RabbitMQ/License Agent/Front Server Controller/Ansible Agent/Auto Update Server (within Web API Server), the SSL protocol should be added to firewall rules to enable SSL connection between servers.

Note: **) The port numbers listed in this column are defaults only. The actual port numbers used during installation might be different.

Note: ***) Ensure the ports (9099 and 15672) are open for future system update.

Reference Specification for 2,001~5,000 Nodes & ≤20 Seats

As the number of network devices and concurrent users increases, the system requires a distributed environment, which requires more machines to provide resiliency and scale-out flexibly based on your network scale. Both physical machines and virtual machines are supported.

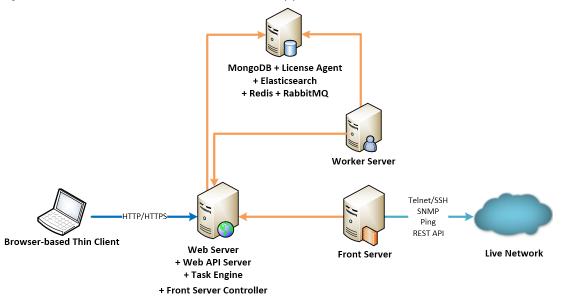

Environment	System Component	Machine Count	CPU ^{8) 10)}	Memory ²⁾	Hard Disk ³⁾	Operating System
					(Free Space)	
2,001~5,000 nodes ≤ 20 users	Web Server Web API Server Task Engine Front Server Controller Service Monitor	1	4 Physical Cores ¹⁾	32GB	200GB	 Windows Server 2016/2019/2022 (Standard/Datacenter Edition), 64-bit
	Worker Server Service Monitor	1	8 Physical Cores ¹⁾	32GB	200GB	
	Front Server Service Monitor	1	4 Physical Cores ¹⁾	8GB	 300GB (HDD) (node # <=2000) ⁵⁾ 300GB (SSD) (node # <=5000) ⁵⁾ 	 Windows Server 2016/2019/2022 (Standard/Datacenter Edition), 64-bit Red Hat Enterprise Linux Server ¹¹⁾ 8.2/8.3/8.4/8.5/8.6/8.7/8. 8/8.9/8.10/9.4/9.5, 64-bit CentOS ¹¹⁾ 8.2/8.3/8.4/8.5, 64-bit

Environment	System Component	Machine Count	CPU ^{8) 10)}	Memory ²⁾	Hard Disk ³⁾ (Free Space)	Operating System
						 Oracle Linux ¹¹⁾ 8.2/8.3/8.4/ 8.5/8.6/8.7/8.8/8.9/8.10/ 9.4/9.5, 64-bit Rocky Linux 8.4/8.5/8.6/8.7/8.8/8.9/ 8.10/9.4/9.5, 64-bit Alma Linux 8.4/8.5/8.6/8.7/8.8/8.9/ 8.10/9.4/9.5, 64-bit
	MongoDB License Agent Elasticsearch Redis RabbitMQ Service Monitor	1	4 Physical Cores ¹⁾	32GB	500GB (SSD)	 Red Hat Enterprise Linux Server ¹¹⁾ 8.2/8.3/8.4/8.5/8.6/8.7/8. 8/8.9/8.10/9.4/9.5, 64-bit CentOS ¹¹⁾ 8.2/8.3/8.4/8.5, 64-bit Oracle Linux ¹¹⁾ 8.2/8.3/8.4/8.5/8.6/8.7/8. 8/8.9/8.10/ 9.4/9.5, 64-bit Rocky Linux
						8.4/8.5/8.6/8.7/8.8/8.9/ 8.10/9.4/9.5, 64-bit • Alma Linux 8.4/8.5/8.6/8.7/8.8/8.9/ 8.10/9.4/9.5, 64-bit

- ¹⁾ If hyper-threading is enabled, one physical core equals two logical processors; in a virtual environment, the number of vCPUs required is twice the number of physical cores (as listed in the table).
- ²⁾ Allocating at least half of the RAM amount for swap space on your Linux server is required to provide the necessary additional memory when the RAM space has been exhausted.
- ³⁾ The required hard disk space must be exclusively reserved for NetBrain.
- ⁴⁾ Minimum bandwidth requirement between Front Server Controller and each Front Server: 10Mbps.
- ⁵⁾ For good performance of data processing and caching, it is recommended to install the Front Server on a machine equipped with:
- Solid State Drive (SSD) when managing up to 5000 nodes

Hard Disk Drive (HDD) when managing up to 2000 nodes

⁶⁾ In order to achieve the best performance, it is recommended that the network delay between the Front Server Controller and the Front Server be within 30ms.

8) CPU must support AVX/AVX2.

⁹⁾ For Linux servers, make sure each path has enough free space to install the component files:

- /var/, /etc/, and /usr/share/ more than 10GB
- /usr/ more than 5GB
- /bin/ more than 500MB

¹⁰⁾ x86_64 processors are supported, while ARM-based processors are not supported.

11) With the end-of-life of Linux 7.*, the following operating systems are only supported for upgrades to R12 and are not available for fresh installations: RHEL 7.5/7.6/7.7/7.8/7.9; CentOS 7.5/7.6/7.7/7.8/7.9; OL 7.7/7.8/7.9.

Network connectivity requirements for 2,001~5,000 nodes

Source	Destination	Protocol *) and Port Number **)
Thin Client	Web Server Web API Server	HTTP/HTTPS (80/443)
Service Monitor Agent	Web API Server	HTTP/HTTPS (80/443)
Web API Server Worker Server Task Engine Front Server Controller	MongoDB	TCP 27017
Web API Server Worker Server	Elasticsearch	TCP (HTTP/HTTPS) 9200
Web API Server	License Agent	TCP 27654
Web API Server Worker Server Front Server Controller	Redis****)	TCP 6379
Web API Server Worker Server Task Engine Front Server Controller	RabbitMQ	TCP 5672

Source	Destination	Protocol *) and Port Number **)
Worker Server Task Engine Front Server	Front Server Controller	TCP 9095
Front Server	Live Network	ICMP/SNMP/Telnet/SSH/REST API
Front Server	Ansible Agent (add-on)	TCP 9098
MongoDB License Agent Elasticsearch Redis RabbitMQ Web Server Worker Server Task Engine Front Server Controller	Web API Server	TCP 9099 ***)
Web API Server	RabbitMQ	TCP 15672 ***)
Web API Server	LLM Services (optional)	HTTPS 443

Note: *) If SSL was enabled for any component including MongoDB/ElasticSearch/Redis/RabbitMQ/License Agent/Front Server Controller/Ansible Agent/Auto Update Server (within Web API Server), the SSL protocol should be added to firewall rules to enable SSL connection between servers.

Note: **) The port numbers listed in this column are defaults only. The actual port numbers used during installation might be different.


Note: ***) Ensure ports (9099 and 15672) are open for future system update.

Note: ****) The network latency should be less than 30 ms for Redis optimal performance.

Note: To optimize the performance, the network delays between MongoDB nodes should be less than 30 ms if a MongoDB replica set is installed.

Reference Specification for 5,001~10,000 Nodes & ≤50 Seats

As the number of network devices and concurrent users increases, the system requires a distributed environment, which requires more machines to provide resiliency and scale-out flexibly based on your network scale. Both physical machines and virtual machines are supported.

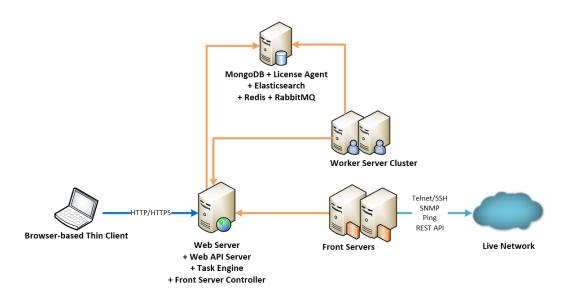

Environment	System Component	Machine Count	CPU ^{9) 11)}	Memory ²⁾	Hard Disk ⁴⁾ (Free Space)	Operating System
5,001~10,000 nodes ≤ 50 users	Web Server Web API Server Task Engine Front Server Controller Service Monitor	1	8 Physical Cores ¹⁾	32GB	200GB	 Windows Server 2016/2019/2022 (Standard/Datacenter Edition), 64-bit
	Worker Server Service Monitor	2	8 Physical Cores ¹⁾	32GB	200GB	
	Front Server Service Monitor	2	4 Physical Cores ¹⁾	8GB	■ 300GB (HDD) (node # <=2000) ⁶⁾ ■ 300GB (SSD) (node # <=5000) ⁶⁾	 Windows Server 2016/2019/2022 (Standard/Datacenter Edition), 64-bit Red Hat Enterprise Linux Server¹²⁾8.2/8.3/8.4/8.5/8.6/8.7/ 8.8/8.9/ 8.10/9.4/9.5, 64-bit CentOS ¹²⁾ 8.2/8.3/8.4/8.5, 64-bit Oracle Linux¹²⁾ 8.2/8.3/8.4/8.5/8.6/8.7/8.8/8.9/ 8.10/9.4/9.5, 64-bit Rocky Linux 8.4/8.5/8.6/8.7/8.8/8.9/8.10/9.4/ 9.5, 64-bit

Environment	System Component	Machine Count	CPU ^{9) 11)}	Memory ²⁾	Hard Disk ⁴⁾ (Free Space)	Operating System
						Alma Linux 8.4/8.5/8.6/8.7/8.8/8.9/8.10/9.4/ 9.5, 64-bit
	MongoDB License Agent Elasticsearch	1	8 Physical Cores ¹⁾	64GB	1TB (SSD)	 Red Hat Enterprise Linux Server¹²/₁₂8.2/8.3/8.4/8.5/8.6/8.7/ 8.8/8.9/ 8.10/9.4/9.5, 64-bit
	Redis RabbitMQ					 CentOS ¹²⁾ 8.2/8.3/ 8.4/8.5, 64-bit
	Service Monitor					• Oracle Linux ¹²⁾ 8.2/8.3/8.4/8.5/8.6/8.7/8.8/8.9/ 8.10/9.4/9.5, 64-bit
						Rocky Linux 8.4/8.5/8.6/8.7/8.8/8.9/8.10/9.4/ 9.5, 64-bit
						Alma Linux8.4/8.5/8.6/8.7/8.8/8.9/8.10/9.4/9.5, 64-bit

- 1) If hyper-threading is enabled, one physical core equals two logical processors; in a virtual environment, the number of vCPUs required is twice the number of physical cores (as listed in the table).
- ²⁾ Allocating at least half of the RAM amount for swap space on your Linux server is required to provide the necessary additional memory when the RAM space has been exhausted.
- ³⁾ Each Front Server is recommended to manage 5,000 network nodes at most.
- ⁴⁾ The required hard disk space must be exclusively reserved for NetBrain.
- ⁵⁾ Minimum bandwidth requirement between Front Server Controller and each Front Server: 10Mbps.
- ⁶⁾ For good performance of data processing and caching, it is recommended to install the Front Server on a machine equipped with:
- Solid State Drive (SSD) when managing up to 5000 nodes
- Hard Disk Drive (HDD) when managing up to 2000 nodes
- 7) In order to achieve the best performance, it is recommended that the network delay between the Front Server Controller and the Front Server be within 30ms.
- ⁹⁾ CPU must support AVX/AVX2.

¹⁰⁾ For Linux servers, make sure each path has enough free space to install the component files:

- /var/, /etc/, and /usr/share/ more than 10 GB
- /usr/ more than 5GB
- /bin/ more than 500MB

Network connectivity requirements for 5,001~10,000 nodes

Source	Destination	Protocol *) and Port Number **)
Thin Client	Web Server Web API Server	HTTP/HTTPS (80/443)
Service Monitor Agent	Web API Server	HTTP/HTTPS (80/443)
Web API Server Worker Server Task Engine Front Server Controller	MongoDB	TCP 27017
Web API Server Worker Server	Elasticsearch	TCP (HTTP/HTTPS) 9200
Web API Server	License Agent	TCP 27654
Web API Server Worker Server Front Server Controller	Redis****)	TCP 6379
Web API Server Worker Server Task Engine Front Server Controller	RabbitMQ	TCP 5672
Worker Server Task Engine Front Server	Front Server Controller	TCP 9095
Front Server	Live Network	ICMP/SNMP/Telnet/SSH/REST API
Front Server	Ansible Agent (add-on)	TCP 9098

¹¹⁾ x86_64 processors are supported, while ARM-based processors are not supported.

¹²⁾ With the end-of-life of Linux 7.*, the following operating systems are only supported for upgrades to R12 and are not available for fresh installations: RHEL 7.5/7.6/7.7/7.8/7.9; CentOS 7.5/7.6/7.7/7.8/7.9; OL 7.7/7.8/7.9.

Source	Destination	Protocol *) and Port Number **)
MongoDB	Web API Server	TCP 9099 ***)
License Agent		
Elasticsearch		
Redis		
RabbitMQ		
Web Server		
Worker Server		
Task Engine		
Front Server		
Front Server Controller		
Web API Server	RabbitMQ	TCP 15672 ***)
Web API Server	LLM Service (optional)	HTTPS 443

Note: *) If SSL was enabled for any component including MongoDB/ElasticSearch/Redis/RabbitMQ/License Agent/Front Server Controller/Ansible Agent/Auto Update Server (within Web API Server), the SSL protocol should be added to firewall rules to enable SSL connection between servers.

Note: **) The port numbers listed in this column are defaults only. The actual port numbers used during installation might be different.


Note: ***) Ensure the ports (9099 and 15672) are open for future system update.

Note: ****) The network latency should be less than 30 ms for Redis optimal performance.

Note: To optimize the performance, the network delays between MongoDB nodes should be less than 30 ms if a MongoDB replica set is installed.

Reference Specification for 10,001~50,000 Nodes & ≤200 Seats

As the number of network devices and concurrent users increases, the system requires a distributed environment, which requires more machines to provide resiliency and scale out flexibly based on your network scale. Both physical machines and virtual machines are supported.

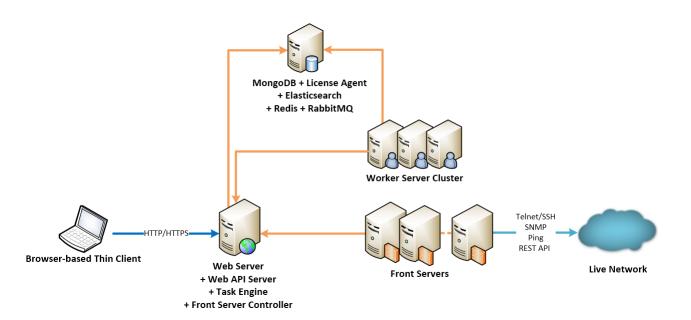

Environment	System Component	Machine Count	CPU ^{9) 11)}	Memory ²⁾	Hard Disk ⁴⁾ (Free Space)	Operating System
10,001~50,000 nodes ≤ 200 users	Web Server Web API Server Task Engine Front Server Controller Service Monitor	1	8 Physical Cores ¹⁾	32GB	200GB	 Windows Server 2016/2019/2022 (Standard/Datacenter Edition), 64-bit
	Worker Server Service Monitor	3	8 Physical Cores ¹⁾	32GB	200GB	
	Front Server Service Monitor	3~10	4 Physical Cores ¹⁾	8GB	 300GB (HDD) (node # <=2000) ⁶ 300GB (SSD) (node # <=5000) ⁶ 	 Windows Server 2016/2019/2022 (Standard/Datacenter Edition), 64-bit Red Hat Enterprise Linux Server ¹²⁾ 8.2/8.3/8.4/8.5/8.6/8.7/8. 8/8.9/8.10/9.4/9.5, 64-bit CentOS ¹²⁾ 8.2/8.3/8.4/8.5, 64-bit Oracle Linux ¹²⁾ 8.2/8.3/8.4/8.5/8.6/8.7/ 8.8/8.9/8.10/9.4/9.5, 64-bit

Environment	System Component	Machine Count	CPU ^{9) 11)}	Memory ²⁾	Hard Disk ⁴⁾ (Free Space)	Operating System
						 Rocky Linux 8.4/8.5/8.6/8.7/8.8/8.9/ 8.10/9.4/9.5, 64-bit Alma Linux 8.4/8.5/8.6/8.7/8.8/8.9/ 8.10/9.4/9.5, 64-bit
	MongoDB License Agent Elasticsearch Redis RabbitMQ Service Monitor	1	8 Physical Cores ¹⁾	128GB	(SSD) With PA license:4TB (SSD) (30000<=node	 Red Hat Enterprise Linux Server ¹²⁾ 8.2/8.3/8.4/8.5/8.6/8.7/ 8.8/8.9/8.10/9.4/9.5, 64-bit CentOS ¹²⁾ 8.2/8.3/8.4/8.5, 64-bit
						 Oracle Linux ¹²⁾ 8.2/8.3/8.4/8.5/8.6/8.7/ 8.8/8.9/8.10/9.4/9.5, 64-bit Rocky Linux
						8.4/8.5/8.6/8.7/8.8/8.9/ 8.10/9.4/9.5, 64-bit • Alma Linux 8.4/8.5/8.6/8.7/8.8/8.9/ 8.10/9.4/9.5, 64-bit

- 1) If hyper-threading is enabled, one physical core equals two logical processors; in a virtual environment, the number of vCPUs required is twice the number of physical cores (as listed in the table).
- ²⁾ Allocating at least half of the RAM amount for swap space on your Linux server is required to provide the necessary additional memory when the RAM space has been exhausted.
- ³⁾ Each Front Server is recommended to manage 5,000 network nodes at most.
- ⁴⁾ The required hard disk space must be exclusively reserved for NetBrain.
- ⁵⁾ Minimum bandwidth requirement between Front Server Controller and each Front Server: 10Mbps.
- 6) For good performance of data processing and caching, it is recommended to install the Front Server on a machine equipped with:
- Solid State Drive (SSD) when managing up to 5000 nodes

Hard Disk Drive (HDD) when managing up to 2000 nodes

7) In order to achieve the best performance, it is recommended that the network delay between the Front Server Controller and the Front Server be within 30ms.

9) CPU must support AVX/AVX2.

10) For Linux servers, make sure each path has enough free space to install the component files:

- /var/, /etc/, and /usr/share/ more than 10GB
- /usr/ more than 5GB
- /bin/ more than 500MB

¹¹⁾ x86_64 processors are supported, while ARM-based processors are not supported.

12) With the end-of-life of Linux 7.*, the following operating systems are only supported for upgrades to R12 and are not available for fresh installations: RHEL 7.5/7.6/7.7/7.8/7.9; CentOS 7.5/7.6/7.7/7.8/7.9; OL 7.7/7.8/7.9.

Network connectivity requirements for 10,001~50,000 nodes

Source	Destination	Protocol *) and Port Number **)
Thin Client	Web Server Web API Server	HTTP/HTTPS (80/443)
Service Monitor Agent	Web API Server	HTTP/HTTPS (80/443)
Web API Server Worker Server Task Engine Front Server Controller	MongoDB	TCP 27017
Web API Server Worker Server	Elasticsearch	TCP (HTTP/HTTPS) 9200
Web API Server	License Agent	TCP 27654
Web API Server Worker Server Front Server Controller	Redis****)	TCP 6379
Web API Server Worker Server Task Engine Front Server Controller	RabbitMQ	TCP 5672

Source	Destination	Protocol *) and Port Number **)
Worker Server Task Engine Front Server	Front Server Controller	TCP 9095
Front Server	Live Network	ICMP/SNMP/Telnet/SSH/REST API
Front Server	Ansible Agent (add-on)	TCP 9098
MongoDB License Agent Elasticsearch Redis RabbitMQ Web Server Worker Server Task Engine Front Server Controller	Web API Server	TCP 9099 ***)
Web API Server	RabbitMQ	TCP 15672 ***)
Web API Server	LLM Service (optional)	HTTPS 443

Note: *) If SSL was enabled for any component including MongoDB/ElasticSearch/Redis/RabbitMQ/License Agent/Front Server Controller/Ansible Agent/Auto Update Server (within Web API Server), the SSL protocol should be added to firewall rules to enable SSL connection between servers.

Note: **) The port numbers listed in this column are defaults only. The actual port numbers used during installation might be different.

Note: ***) Ensure the ports (9099 and 15672) are open for future system update.

Note: ****) The network latency should be less than 30 ms for Redis optimal performance.

Note: To optimize the performance, the network delays between MongoDB nodes should be less than 30 ms if a MongoDB replica set is installed.

Deployment Prerequisites

The following requirements must be satisfied before setting up your NetBrain system:

• The operating system must be installed with an English-language version (not language packs).

- When installing NetBrain servers, comply with your company security policy to set the passwords and archive them for further reference.
- NetBrain servers use hostnames to identify and communicate with each other. Make sure each server has a unique hostname.
- Add all the NetBrain installation folders and files (on both Windows and Linux) to the allow list of antivirus software for routine scans, and keep the TCP connections unblocked between NetBrain components.
- If the machine's firewall is turned on, make sure the firewall rules allow traffic to all the ports and protocols that will be used by the NetBrain system.
- The Service Monitor Agent running on the Linux server(s) uses "netbrainadmin" user, and this user needs sudoers privilege to monitor other NetBrain components as well as to execute the system update tasks.


Special Requirements for Client Machine

- o It is recommended to deploy the NetBrain Smart CLI on the same machine where the browser-based thin client is used, and the machine needs to meet the following minimum system specifications:
 - ❖ 4 Physical CPU Cores (If hyper-threading is enabled, one physical core equals two logical processors; in a virtual environment, the number of vCPUs required is twice the number of physical cores)
 - ❖ 8GB RAM
- o Ensure to reserve at least 50% system capacity for the satisfactory performance of NetBrain Browserbased Thin Client and Smart CLI Application.

Special Requirements for Windows Server

- o Users with administrative privileges of the machine are required to implement the installation.
- NetBrain Integrated Edition should not be installed on the same server as an existing NetBrain. Enterprise Edition (6.2 or earlier version), except that Front Server and Network Server (EEv6.2) can be installed on the same machine.
- o There must be more than **5GB** free space in the system drive (for example, C drive) to complete the installation no matter which drives the NetBrain system will be installed on.
- o Temporarily disable antivirus software during the installation process.
- o Ensure the NetBrain installation process using administrator account has the necessary permissions to modify "User Rights Assignment" in "Local Security Policy" or change the local user privileges.

Otherwise, the following error message will prompt when installing each Windows component.

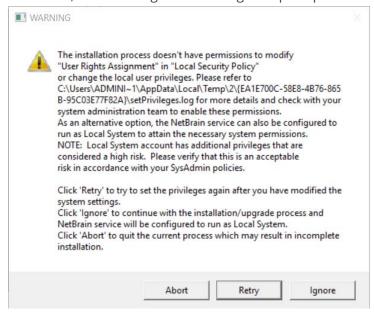

- Click **Ignore** to continue with installation/upgrade process and NetBrain service will be configured to run as Local System.
- If you have security concerns, click **Abort** to quit the installation/upgrade process.
- Click Retry after you have modified the system settings.

Note: Local System accounts have additional privileges that are considered a high risk. Please verify that this is an acceptable risk in accordance with your SysAdmin policies.

Note: After clicking Abort, please check with your system administration team to enable the relevant permissions, uninstall the affected component(s) and reinstall. Contact NetBrain support team if you need any assistance during the process.

Special Requirements for Linux Server

- o Users with root privileges of the machine are required to implement the installation.
- o It is highly recommended to store the data files and log files of NetBrain servers into separated disk partitions. Make sure each partition has enough disk space.
 - More than 100GB free space in the directory where the data files of MongoDB/Elasticsearch will be saved.
 - More than **50GB** free space in the directory where the log files of MongoDB/Elasticsearch will be saved.
 - More than **180GB** free space for the Front Server PostgreSQL data path.

Supported Web Browsers

Web Browsers	Supported Versions
Chrome	Version 120 and higher
Safari on macOS	Version 17.0 and higher
Firefox	Version 120 and higher
Microsoft Edge based on Chromium	Version 120 and higher

Note: The system is designed to work with a minimum screen resolution of 1440x900 pixels.

Third-Party Dependencies

The following table lists the third-party dependencies that must be pre-installed before NetBrain components are installed.

System Component	Third-party Dependencies
MongoDB (Linux)	■ Systemd
License Agent (Linux)	■ Systemd
Elasticsearch (Linux)	OpenJDK v21.0.4Systemd
Redis (Linux)	LogrotateSystemd
RabbitMQ (Linux)	Erlang-26.2.5.3SocatSystemd

System Component	Third-party Dependencies
Web Server Web API Server Worker Server	 Microsoft Visual C++ 2022 Redistributable IIS 8/10 Python 3.12.7 Microsoft .NET Framework 4.8
Task Engine	 Microsoft Visual C++ 2022 Redistributable OpenJDK v21.0.4
Front Server Controller	Microsoft Visual C++ 2022 Redistributable
Front Server (Windows)	 Microsoft Visual C++ 2022 Redistributable Python 3.12.7
Front Server (Linux)	 Systemd Python 3.12.7 glibc libstdc++ libuuid pam libnsl (Linux v8.*)
Service Monitor Agent (Windows)	Python 3.12.7
Service Monitor Agent (Linux)	Python 3.12.7Systemd
Ansible Agent (add-on)	 Ansible: (Linux v8.*) 2.16 or higher versions with Paramiko 2.6.0 (Linux v9.*) 2.14 or higher versions with Paramiko 2.6.0 Git Systemd

NetBrain Hard Disk Performance Specifications

Sequential Bandwidth -	560 MB/S	Sequential Bandwidth - 100% Read (up to)
100% Read (up to)		Speed with which the device is able to retrieve data
		that forms one contiguous ordered block of data.
		Measured in MB/s (MegaBytes per Second)

Sequential Bandwidth - 100% Write (up to)	510 MB/s	Sequential Bandwidth - 100% Write (up to) Speed with which the device is able to record data into one contiguous ordered block of data. Measured in MB/s (MegaBytes per Second)
Random Read (100% Span)	97000 IOPS (4K Blocks)	Random Read (100% Span) Speed with which the SSD is able to retrieve data from arbitrary locations in the memory, across the entire span of the drive. Measured in IOPS (Input/Output Operations Per Second)
Random Write (100% Span)	32000 IOPS (4K Blocks)	Random Write (100% Span) Speed with which the SSD is able to record data to arbitrary locations in the memory, across the entire span of the drive. Measured in IOPS (Input/Output Operations Per Second)